


JUMBERCA RETURNS



High speed 3-thread fleece Machine
Perfect Plating of binding and
ground yarn

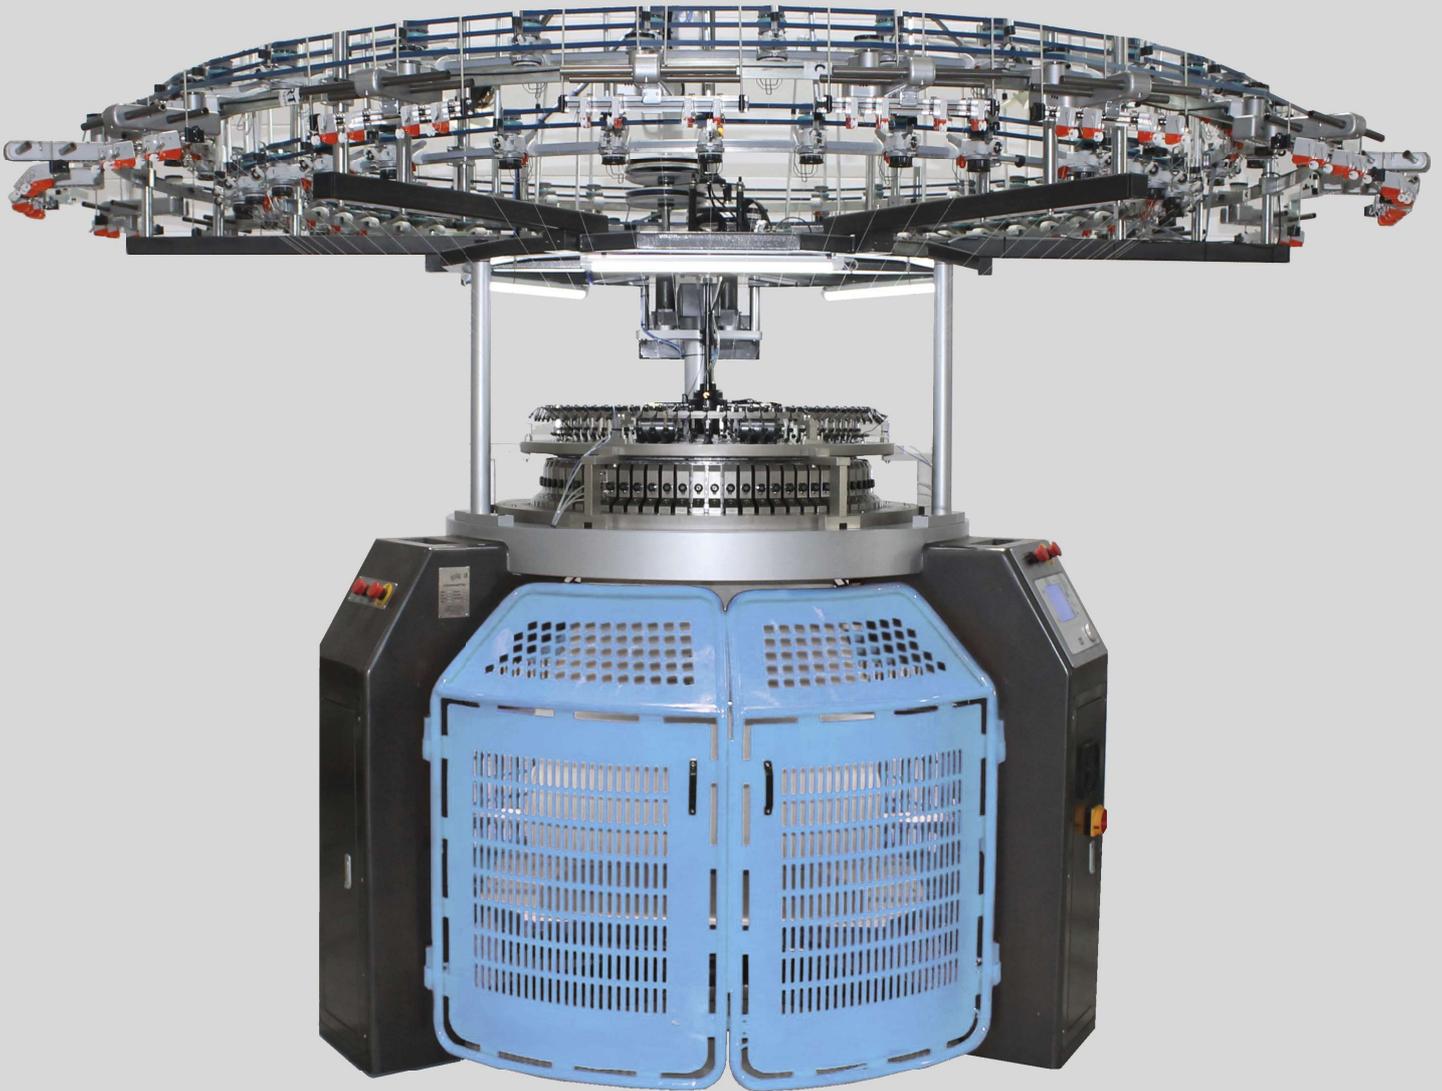

4SF90
4SF96

power of innovation by



CANMARTEX

3-thread fleece machine with two versions:

- 3 feeders/inch
- 3.2 feeders/inch

This model of machine has conversion kit available to: machine single jersey 4 tracks and/or machine single terry.

Standard features:

- Solid frame with system of cylinder bearing submerged in an oil bath.
- Central and individual stitch length adjustment.
- Cylinder and needles supplied by GB.
- Ceramic yarn carries.
- Positive feeders supplied by Memminger.
- Elastomeric plating equipment with MER.
- 500 mm fabric rolls.
- Fabric folding device.
- Martex aluminum tube side creel.
- Pulsonic 5.2 oiler.
- Control Navigator Memminger.
- Frequency controlled drive (AC) 5,5 Kw.

Optional features:

- Conversion kit to model 4S
- Conversion kit to model 4ST
- Industrial frame for 800 and 1000 mm fabric rolls.
- Open width device.
- Electronic needle detector.

Under customer requirements, our I+D+i department will work to get the target exclusively to each demand.



Model	4SF90	4SF96	B.S.
Diameter inch	26" - 42"	26" - 42"	8" - 24"
Gauge	14 - 28	14 - 28	14 - 28
Number of feeders	3	3,2	3 - 3,2

subject to technical changes illustrations may show accessories that are not included in the standard version



www.canmartex.com

Polígono Industrial El Cros · Carrer Can Diners, 1-11
08310 Argentona (Barcelona) · Tel. (34) 937 594 544
canmartex@canmartex.com